


TRIGGER AND PUSH START CLUTCH TYPE SERIES

SK-9 Series [SK-9131L/P(LF/PF), SK-9231L/P(LF/PF)]



External Dimension

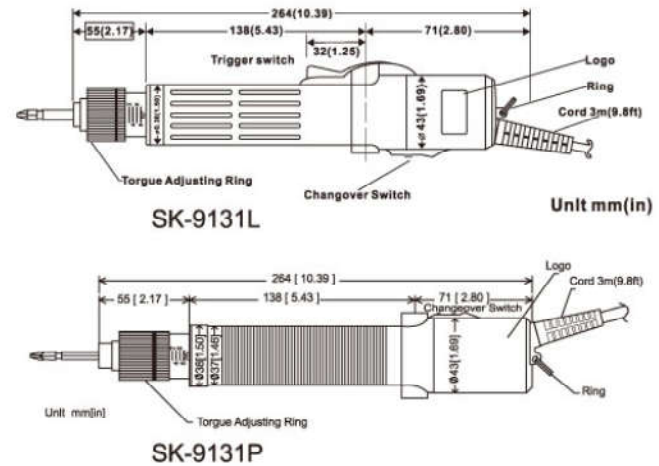


SK-9131L, SK-9231L, SK-9131LF, SK-9231LF

- Small outer dimension, light-weight.
- Mid-range torque 5-20 kgf.cm.
- High rotation speed, torque accuracy $\pm 3\%$.
- Best fit for general machine screws operation.
- Torque adjustable and fixable with a fixing ring (KC-2).
- ※ Conform to EMI, EMC International Safety Standards.

SK-9131P, SK-9231P, SK-9131PF, SK-9231PF

- Small outer dimension, light-weight.
- Mid-range torque 5-20 kgf.cm.
- High rotation speed, torque accuracy $\pm 3\%$.
- Best fit for general machine screws operation.
- Torque adjustable and fixable with a fixing ring (KC-2).
- ※ Conform to EMI, EMC International Safety Standards.

Torque Range Chart

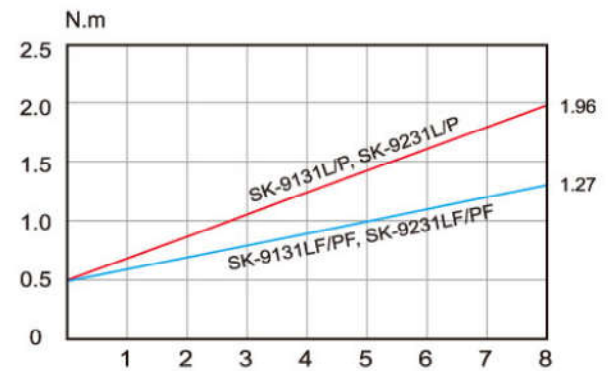

Specifications

Model		SK-9131L	SK-9131P	SK-9131LF	SK-9131PF	SK-9231L	SK-9231P	SK-9231LF	SK-9231PF
Input Voltage		AC110~120V 50/60Hz				AC220~240V 50/60Hz			
Torque	(kgf.cm)	5~20		5~13		5~20		5~13	
	(Lbf.in)	4.34~17.35		4.34~11.24		4.34~17.35		4.34~11.24	
	(N.m)	0.49~1.96		0.49~1.27		0.49~1.96		0.49~1.27	
Repeatable Torque Accuracy(%)		$\pm 3\%$							
Torque Adjustment		Stepless							
Free Speed(r.p.m)		1000		2000		1000		2000	
Power Consumption		0.3A		0.3A		0.2A		0.2A	
Screw Size Dia (mm)	Machine Screw	2.6~4.0		2.0~3.5		2.6~4.0		2.0~3.5	
	Tapping Screw	2.6~3.5		2.0~3.0		2.6~3.5		2.0~3.0	
Weight(g)		620							
Length(mm)		264							
ESD(Anti-Static)		-							
UL(CUL)		-							
CE		-							
RoHS		✓							

Accessories



Bit Type

